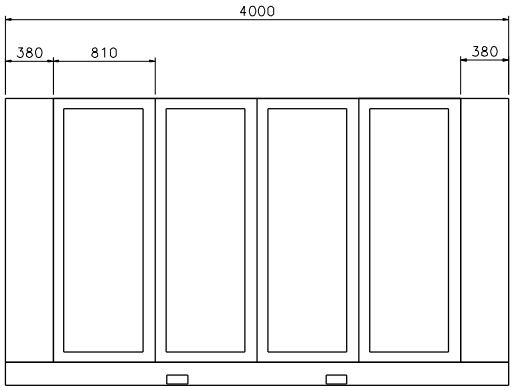

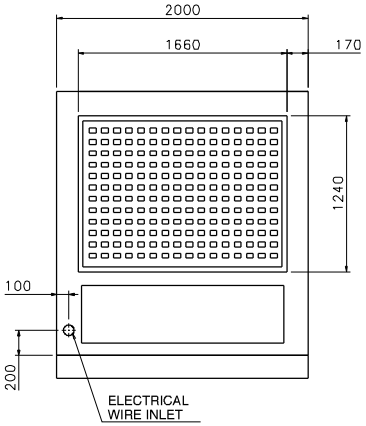

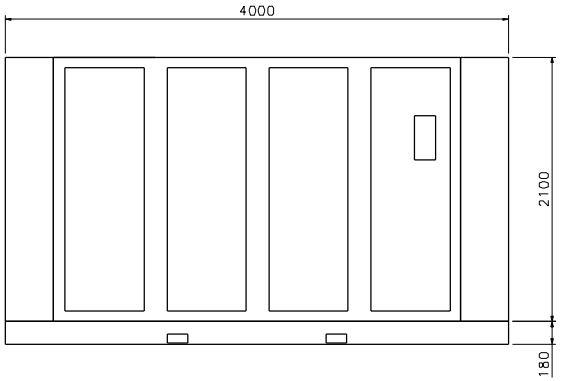

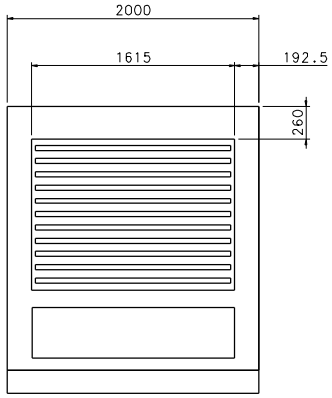

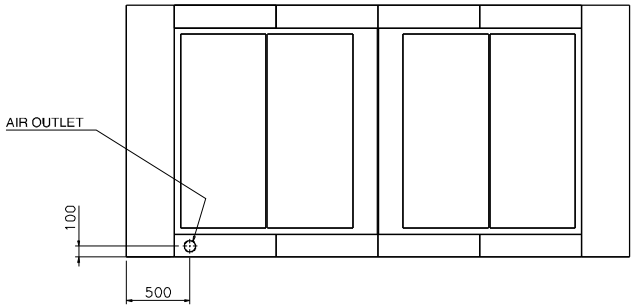

NOTES:

CONNNECTIONS		
A	COMPRESED AIR OUTLET	3" MALE
B	ELECTRICAL ENTRY	58,5 mm
C	OIL TANK DRAIN	3/4"FEMALE WITH PLUG
D	AIR COOLING FLOW RATE	52 m3/min
E	CONDANSATE DRAIN POINT	——
F	WEIGHT	4450

NOTE:
IT IS RECOMENDED THAT A MINIMUM OF 60 cm CLEARANCE ON ALL SIDES AND ABOVE THE COMPRESSOR FOR MAINTANENCE PURPOSES

REV	DESCRIPTIONS	DRAW	CHK'D	APPR.	DATE
A	ADD TABULATION, TANK DRAIN, ELEC.NOTE	V.S.	I.K.	R.O.	02 MAR 07

THIS DRAWING IS THE PROPERTY OF ANKARA HAMAK IND., AND IS TRANSMITTED IN CONFIDENCE. NEITHER RECEIPT NOR POSSESION CONFERS OR TRANSFERS ANY RIGHTSTO REPRODUCE,USE OR DISCLOSE, IN WHOLE OR PART,DATA CONTAINED HERE IN FOR ANY PURPOSE, WITHOUT THE WRITTEN PERMISSION OF ANKARA HAMAK IND.

UNLESS OTHERWISE SPECIFIED DIMENSIONES ARE IN INCHES
TOLERANCES ON
FRACTIONS ± —— DECIMALS .X ± .XX ± .XXX ±
ANGELS ±

CONTRACT NUMBER

DATE OF DRAWING 11 JAN 2007

DRAFTSMAN V.SAKAL | CHECKER I.KARAHAN

ENGINEER B.OZKAN | FUNCTIONAL DESIGN

MANUFACTURING | WELDING

APPROVED R.OKÇÜN

NEXT ASSY | USED ON

APPLICATION

VORTEX COMPRESSOR

ERS 250 COMPRESSOR

DIMENSIONS

CODE IDENT NO.

SIZE A0 | DRAWING NO. 00-2500-9000

SCALE 1:10 | UNIT WT —— LB | SHEET OF