
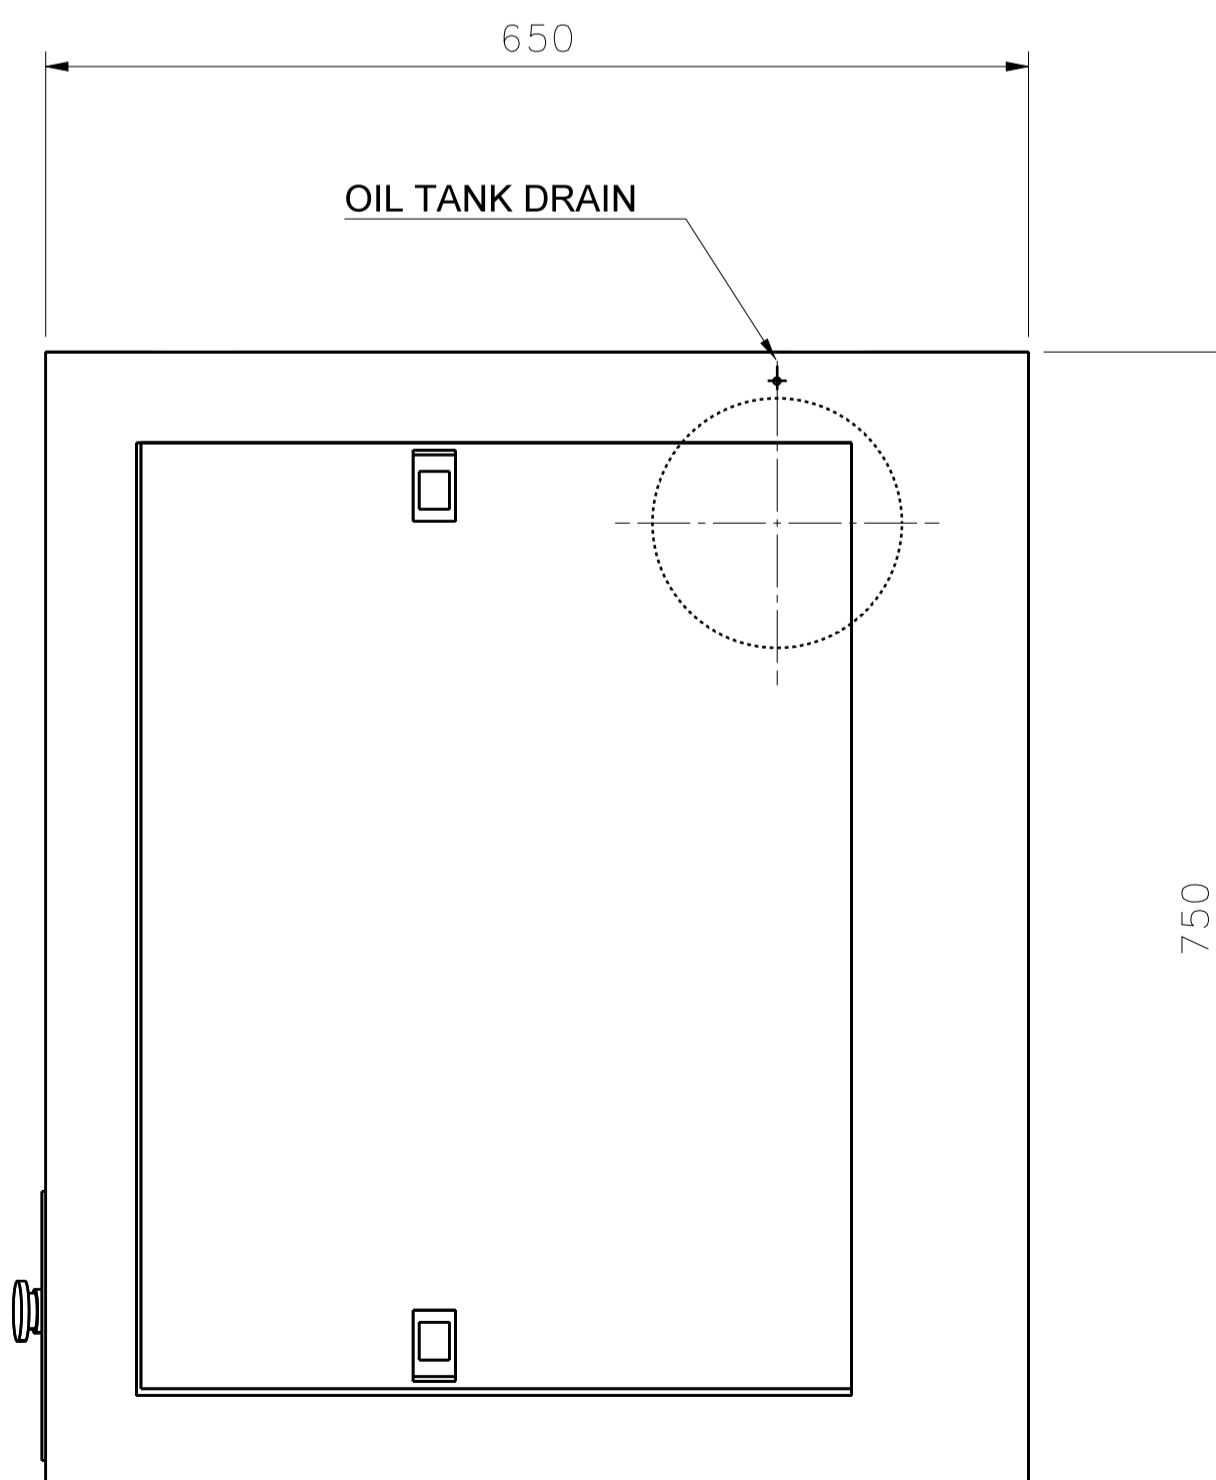
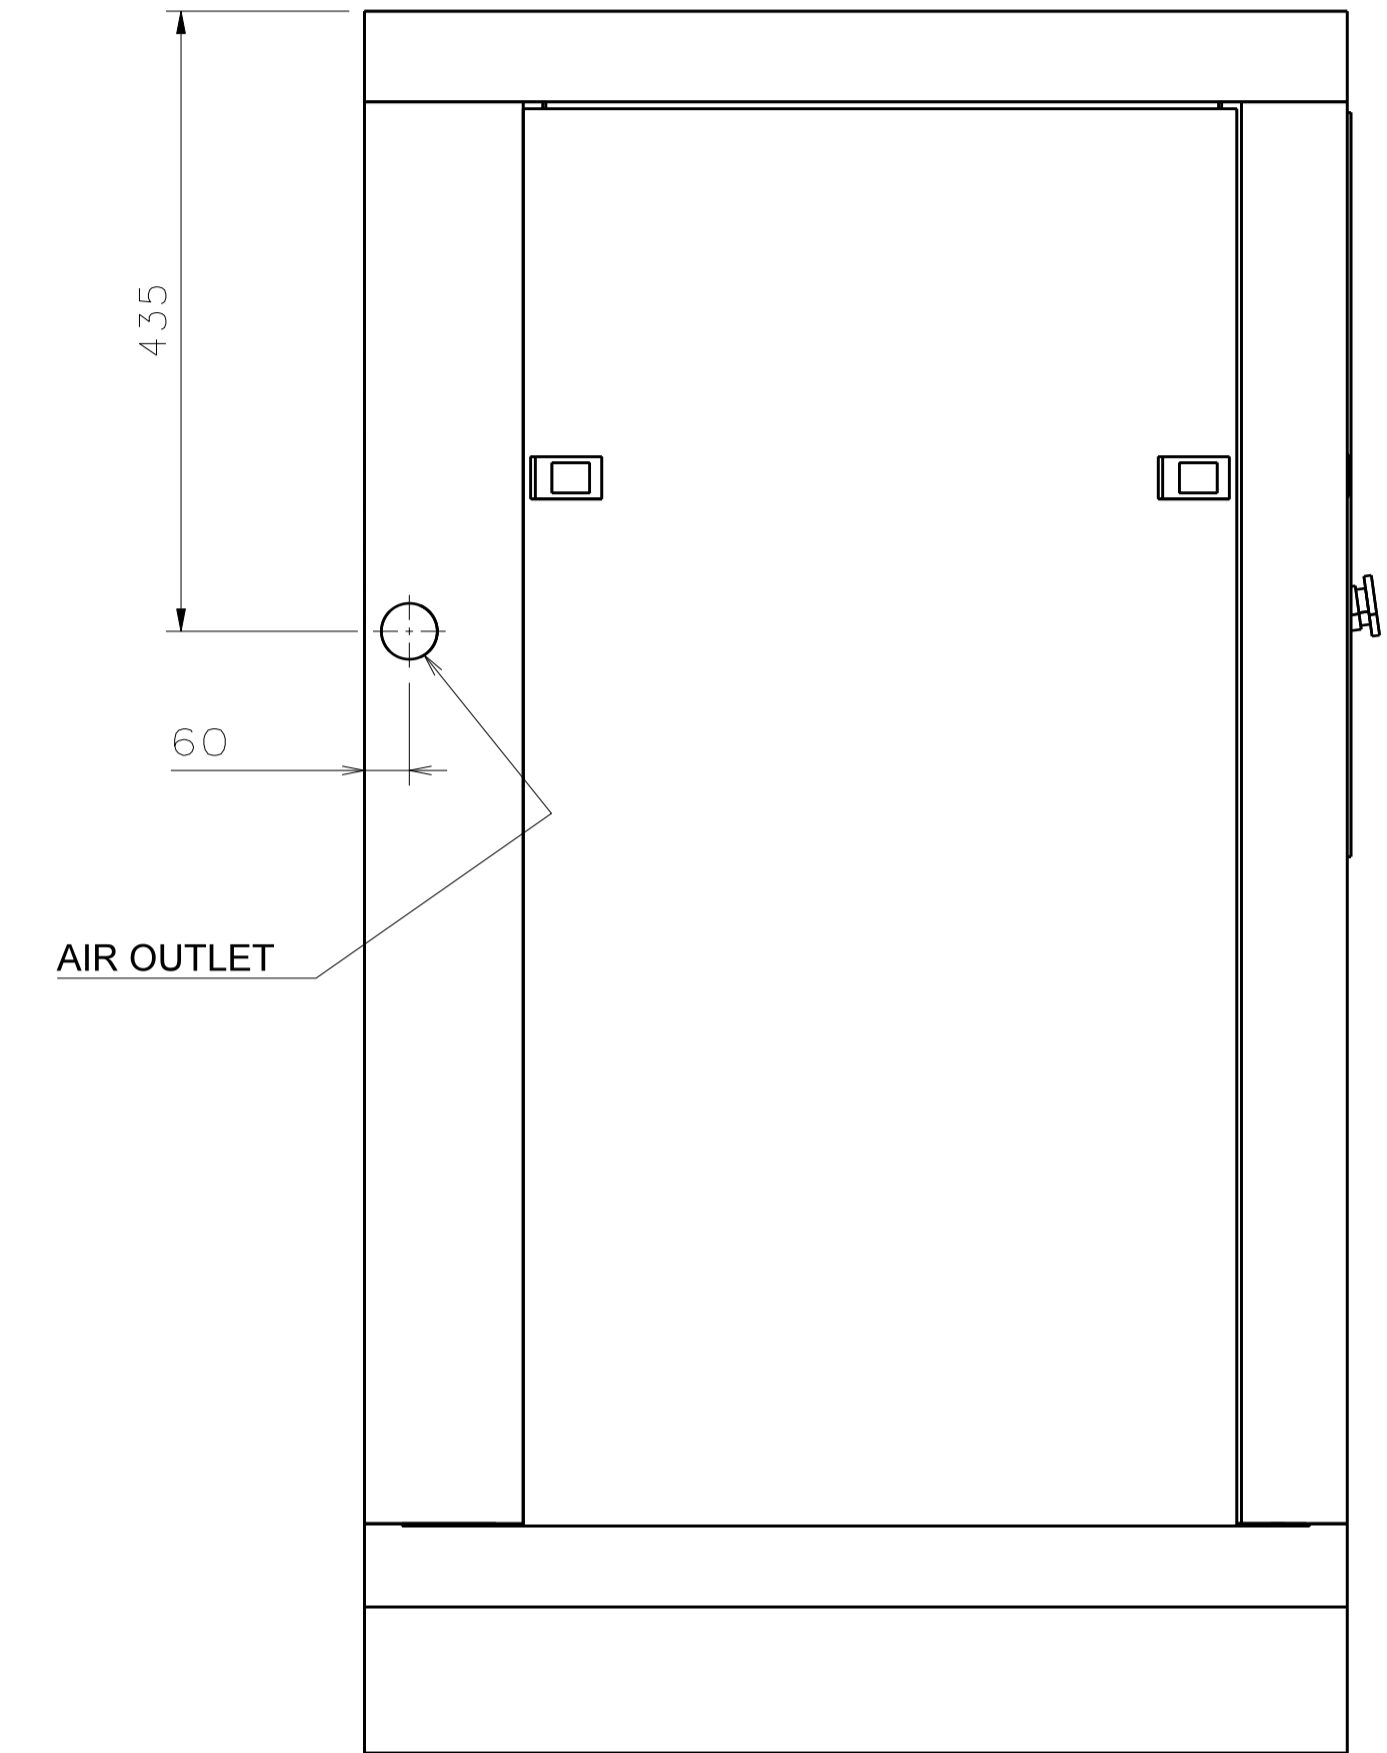


ELECTRICAL CONNECTION ACCESS VIA REMOVABLE PANEL THIS SIDE

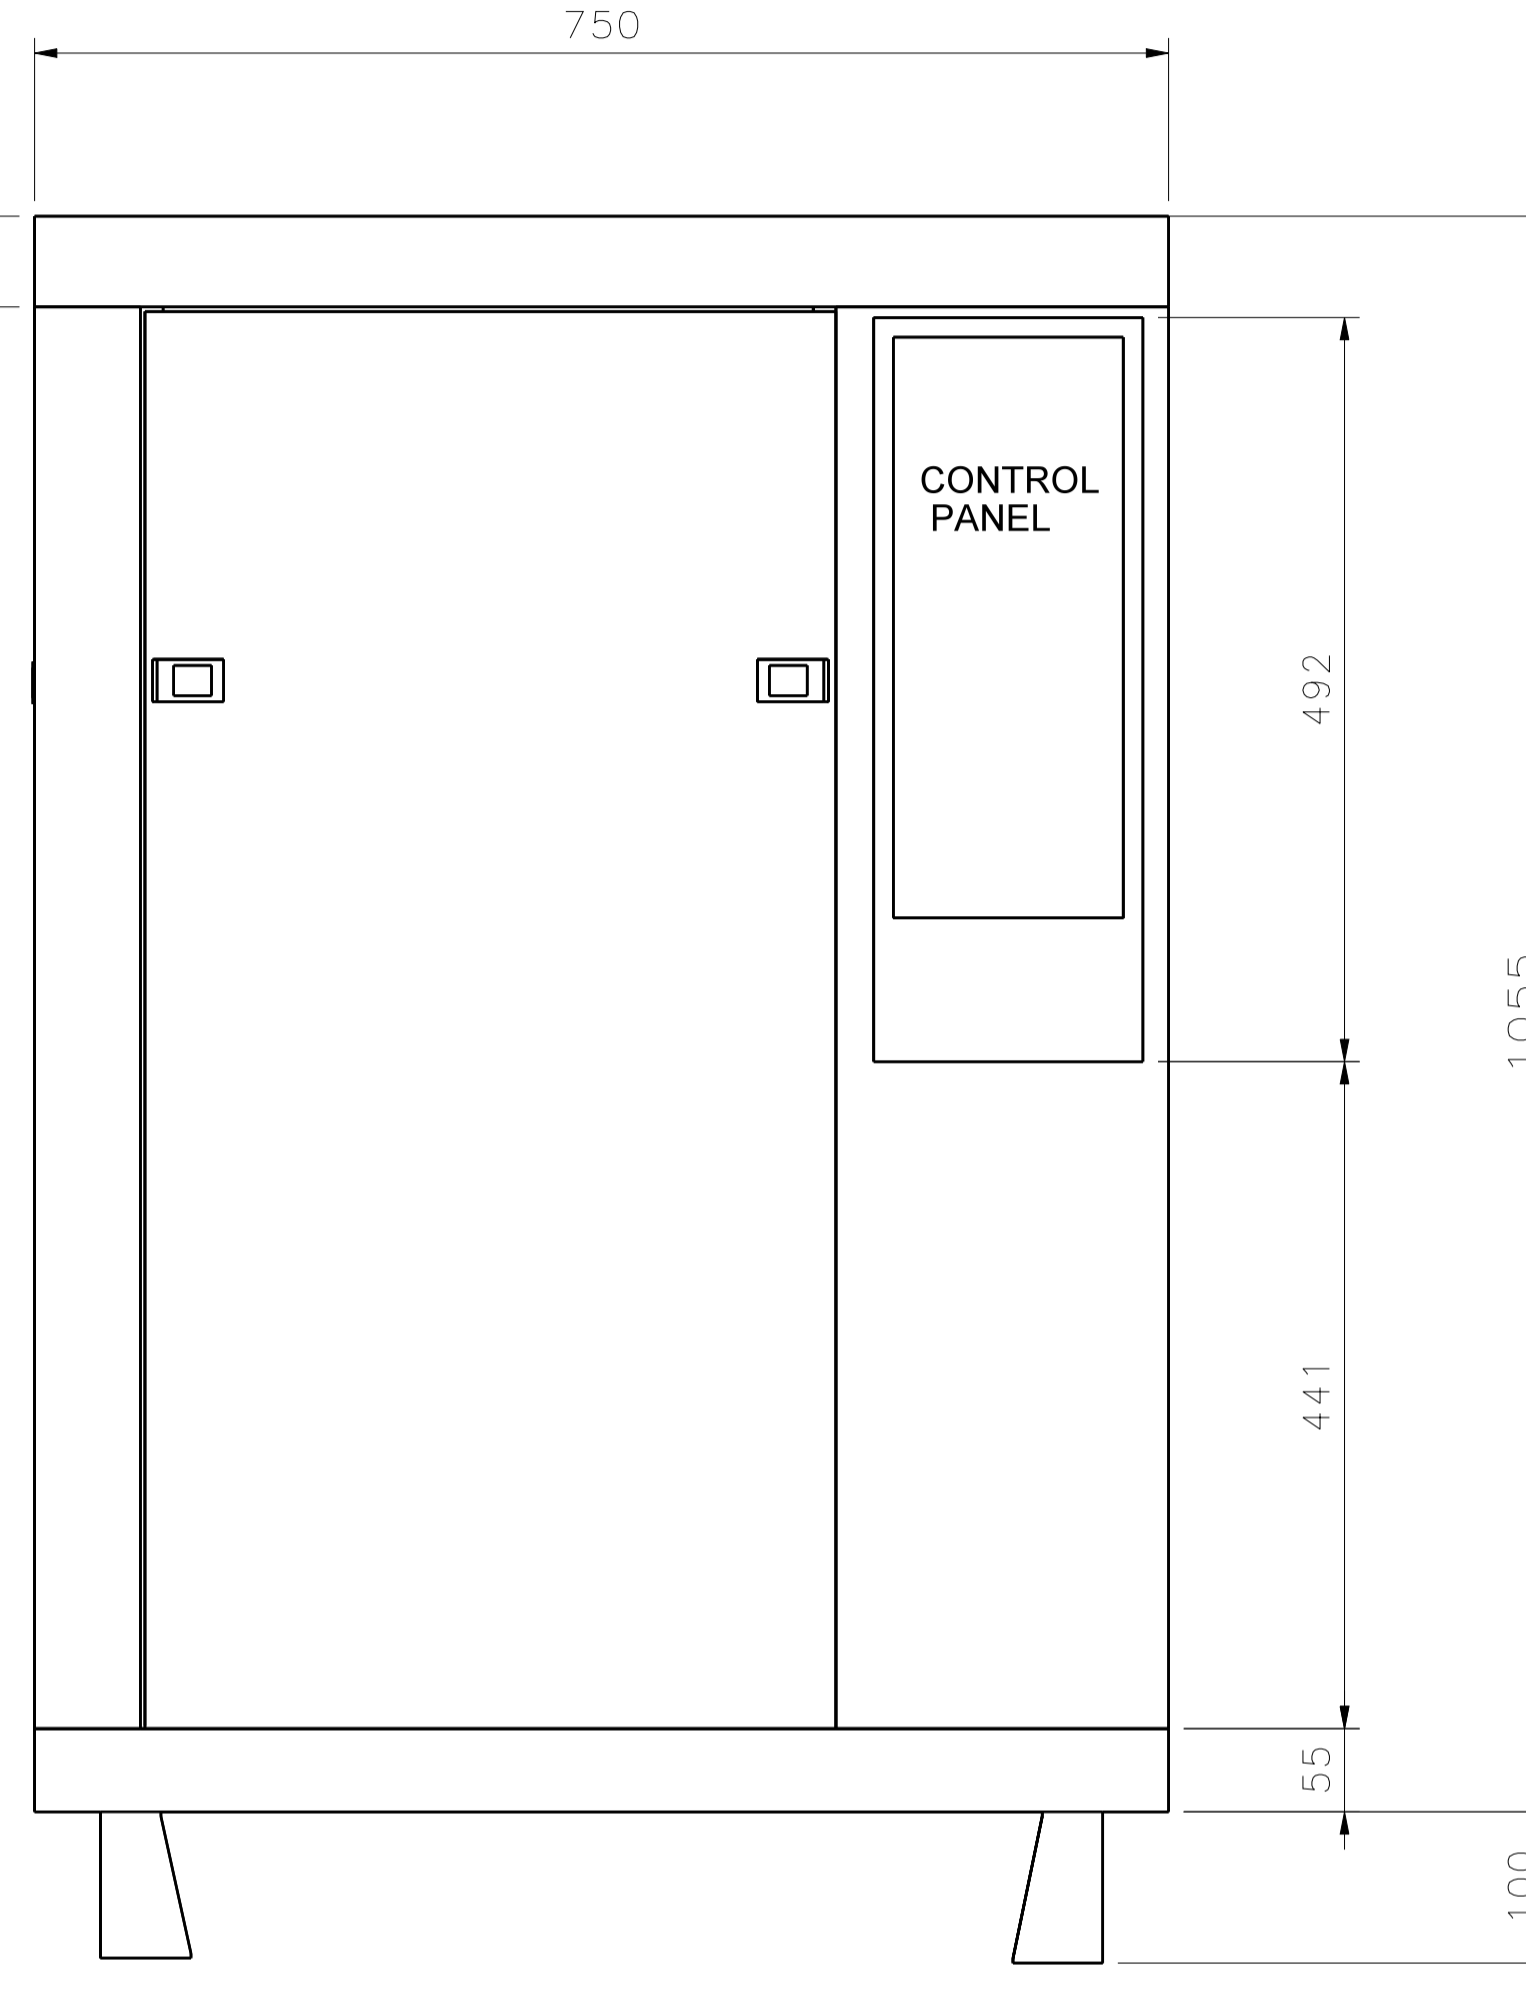

NOTE:
IT IS RECOMMENDED THAT A MINIMUM OF 60 cm CLEARANCE ON ALL SIDES AND ABOVE THE COMPRESSOR FOR MAINTANENCE PURPOSES

NOTES:

CONNECTIONS		
A	COMPRESSED AIR OUTLET	3/4" MALE
B	ELECTRICAL ENTRY	36.5 mm
C	OIL TANK DRAIN	1/2" FEMALE WITH PLUG
D	AIR COOLING FLOW RATE	1.4 m ³ /min
E	CONDANSATE DRAIN POINT	—
F	WEIGHT	195 KG

25.05.2021

REV	DESCRIPTIONS	DRAW	CHK'D	APPR.	DATE
C	CHAGE DIM.	V.S.	I.K.	R.Ö.	16 NOV 12
B	CHAGE DIM.	V.S.	I.K.	R.Ö.	01JAN 08
A	ADD TABULATION, TANK DRAIN, ELEC.NOTE	V.S.	I.K.	R.Ö.	02 MAR 07

THIS DRAWING IS THE PROPERTY OF ANKARA HAMAK IND. AND IS TRANSMITTED IN CONFIDENCE. NEITHER RECEIPT NOR POSSESSION CONFERS OR TRANSFERS ANY RIGHTS TO REPRODUCE, USE OR DISCLOSE, IN WHOLE OR PART, DATA CONTAINED HEREIN FOR ANY PURPOSE, WITHOUT THE WRITTEN PERMISSION OF ANKARA HAMAK IND.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON		CONTRACT NUMBER		ERS 7,5 COMPRESSOR	
FRACTIONS DECIMALS		DATE OF DRAWING			
± — .X ±		10 APR 2014		DIMENSIONS	
ANGELS .XX ±		DRAFTSMAN	CHECKER		
± .XXX ±		V.SAKAL	I.KARAHAN	CODE IDENT NO.	
VORTEX COMPRESSOR		ENGINEER	FUNCTIONAL DESIGN	SIZE	
APPROVED R.ÖKÇÜN		B.OZKAN		A1	DRAWING NO.
NEXT ASSY USED ON		MANUFACTURING	WELDING	00-0075-9000	
APPL ICATION		APPROVED		SCALE 1:5	UNIT WT ——— LB SHEET OF